


Seatback cushion installation

1. Place cushion centered on seatback with snaps open ends facing to the back of seatback.
2. Fold the tabs with snaps over the top of the seatback, mark the plastic where center two snaps line up.
3. Using a Phillips #2 bit, install self tapping button screws on the two marks.
4. Stretch the corners of the cushions out and mark where the snaps line up. Then repeat step #3.

Moving to the bottom of the cushion, fold the tabs under, pull the cushion tight and repeat steps #2 through #4.

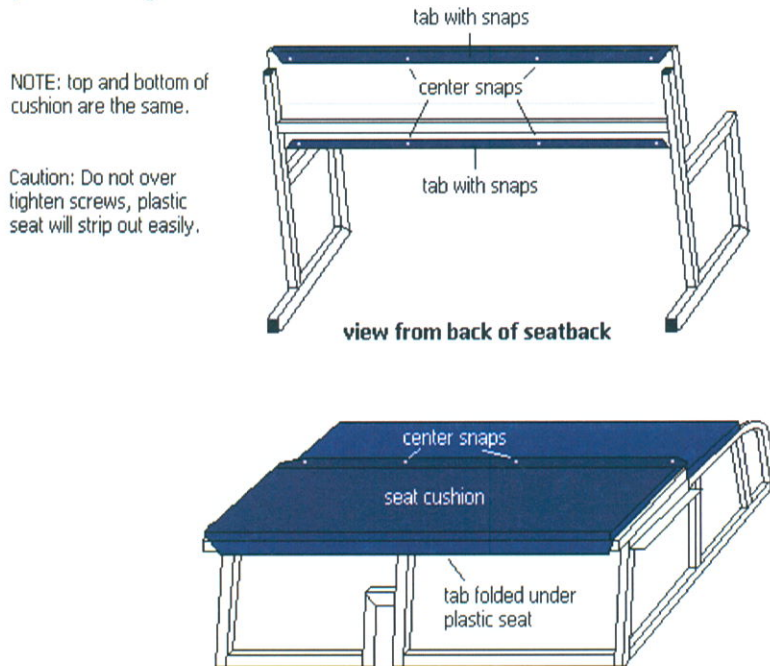

Seat cushion installation

1. Place cushion centered on seat with snaps open ends facing down.
 2. Fold the tab with snaps on the front of the cushion under the plastic seat and mark where the center two snaps line up.
 3. Using a Phillips #2 bit, install self tapping button screws on the two marks.
 4. Stretch the corners of the cushion out and mark where the snaps line up. Then repeat step #3.
 5. Moving to the back of the seat cushion, pull the cushion tight and mark where the center two snaps line up on the carpet.
 6. Using a Phillips #2 bit install the longer carpet button screws on the two marks.
- Finally pull the corners tight, mark where the buttons line up, and using a Phillips #2 bit install the carpet button screws